


MOORE'S WOOD®

Penetrating Wood Preservative Water Based 090

090 MOORE'S WOOD is a ready-to-use water based wood preservative for amateur, professional and industrial use against wood Rot and Blue Stain on internal and external wood components such as windows, exterior doors, cladding, fences, eaves and carports. Not for use on wood in direct soil contactor in marine environment. Type: Wood preservative, water based. It contains: 3-iodo-2-propynyl butylcarbamate (55406-53-6) 0,75 % w/w and Propiconazole (ISO) (60207-90-1) 0,24 % w/w.

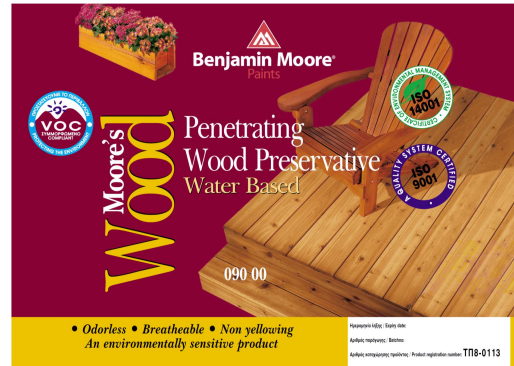


Performance Features

- Protects wood against insects, fungi, mould, blue stains and every kind of micro-organisms.
- Deep penetration and elasticity.
- Allows wood to breath.
- Easy application, dries quickly.
- For interior/Exterior use.

Colors: Clear

Toxicity: Formulated without lead or mercury

Gloss Level: Flat 0-5



Performance Guide:

Weather Resistance

Excellent weather resistance.

Heat Resistance

Not applicable.

Water Resistance

Excellent rain and condensation resistance.

Abrasion Resistance

Not applicable.

Solvent Resistance

Not applicable.



VOC (Volatile Organic Compounds) CONTENT. EU maximum VOC content limit values (Directive 2004/42/CE) for this product (category A/h "Binding primers" Type WB): 30 g/L. This product contains maximum 29 g/L VOCs (ready for use product).

Spreading Rate	Volume Solids	Wet Film Thickness	Dry Film Thickness
8 - 10 m ² /L depending on wood porosity	15%	Minimum	Minimum
Dry Time at 20°C	Flexibility	Thinning	For Application By
30 minutes to touch 1-2 hours to recoat	6 mm mandrel	Do not thin	Brush, Sponge, Spray, Dipping

Surface Preparation

Surfaces must be clean, dry and free of dirt, oil or grease. Completely remove old or poorly adhering varnish and paint to expose new wood. On tropical wood wash down with nitro thinner to remove resins that may lengthen dry times. If mildew is evident it must be removed by scrubbing with a commercial mildew wash, following manufacturer's direction and cautions.

Application

Stir thoroughly before and during use. Apply without thinning by brush, cloth or by dipping. For greater protection finish by applying 2 coats of colored 093/094 Acrylic Varnish. Do not apply when temperature is below 10°C or against the hot sun. Drying times are longer in cool/moist condition.

Caution

Do not expose exterior wood only with a preservative or colorless.

Notice

Uneven color might show on film if applied when high humidity is present, which will disappear in time.

Clean Up: Clean equipment in warm, soapy water.

HEALTH, SAFETY & ENVIRONMENTAL INFORMATION:

Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand. Harmful to aquatic life with long lasting effects. Avoid release to the environment. Dispose of contents and container in accordance with all local, regional, national and international regulations. Contains 3-iodo-2-propynyl butylcarbamate and propiconazole (ISO). May produce an allergic reaction. Keep container tightly closed.

FIRST AID MEASURES:

Get medical attention immediately. If inhaled, remove to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Do not induce vomitin unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Additional information: See Section 4 of the safety data sheet (first aid measures).

License number for Greece: TP8-0113

Packaging and Storage

Sizes : 0,75 litre, 2,25 litres

Flash Point: none

Storage: Refer to Safety Data Sheet