


**BENWOOD®**  
**STAYS CLEAR®**  
 For Interior Use  
**422 Gloss / 423 Satin**

A premium quality product that combines polyurethane and acrylic resins to produce a clear, durable, non yellowing finish. Dries quickly with low odour. Provides high resistance to abrasion and protection against alcohol, water and most household chemicals and stains. Can also be used as protective coating over previously painted surfaces. Ideal for floors and other hard usage areas. Formulated without lead.

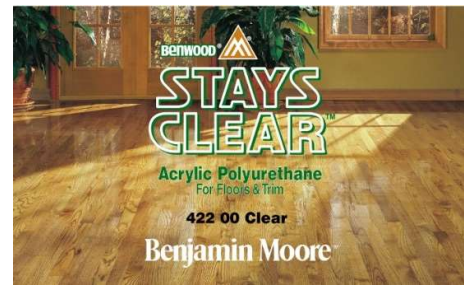

#### Performance Features

- Hard wearing durable.
- Non yellowing, high gloss.
- Use on interior surfaces.
- Low odour during application, soap and water cleanup.
- Suitable for light use areas.

**Colors:** Clear.

**Toxicity:** Formulated without lead or mercury

**Gloss Level:** 422 Gloss and 423 Satin.

#### Performance Guide:

##### Weather Resistance

Not recommended for exterior use.

##### Water Resistance

Resists water and alcohol.

##### Abrasion Resistance

Good resistance to abrasion.

##### Solvent Resistance

Good resistance to alcohols and common household chemicals.  
 Sensitive to aromatic hydrocarbons and other strong solvents.



**VOC (Volatile Organic Compounds): 422 Gloss, 423 Satin Benwood STAYS CLEAR Acrylic Polyurethane:** belongs to the category A/i WB (One pack performance coating). EU Limit: 140g/l (2010). This product contains 139g/L VOC

Spreading Rate	Volume Solids	Wet Film Thickness	Dry Film Thickness
9 – 10 m <sup>2</sup> /L	30%	111 micrometres	33 micrometres
Dry Time at 20°C	Flexibility	Thinning	For Application By
1 hour to touch 3-4 hours to recoat	Passes 6mm mandrel	5% water	Brush, Roller , Spray

#### Surface Preparation

Surfaces to be finished must be free of wax, dirt, grease, dust and other contaminants. Dull glossy areas by sanding (do not use steel wool). **New wood:** Sand smooth using fine sandpaper following the grain of the wood.

**Old finishes:** Remove old finishes in poor condition. Sand old finishes in good condition until smooth.

#### Application

Stir thoroughly before use but do not shake. Apply as received in the container. Thin, if necessary with up to 5% of clean water. Apply by brush, roller, airless spray or applicator pad. Apply along the wood grain in thin, even coats. Maintain a wet edge during application - avoid working back into partially dried areas. Apply two or more coats over previous finishes and at least three coats on new wood. Sand lightly between coats to insure a smooth finish but do not use steel wool. Do not apply at air and surface temperatures below 10°C or under humid conditions.

**Clean Up:** Clean equipment in warm, soapy water promptly after painting..

#### Precautions Health, Safety and Environmental Protection

•If medical advice is needed, have product container or label at hand. •Keep out of reach of children. •Keep container tightly closed. •Do not get in eyes, on skin, or on clothing. •Avoid release to the environment. •Call a POISON CENTER or a doctor if you feel unwell. •Dispose of contents and container to appropriate waste site or recycled in accordance with local and national regulation. •Safety data sheet available on request. •Contains: mixture of: 5-chloro-2-methyl-4-isothiazolin-3-one and 2-methyl-2H-isothiazol-3-one (3:1), •1,2-Benzisothiazol-3(2H)-one, 2,4,7,9-Tetramethyldec-5-yne-4,7-diol. May produce an allergic reaction.

POISON CENTER TEL.: +302107793777

#### Packaging and Storage

**Sizes :** 0,75 litre, 2,5litres,

**Flash Point:** none

**Storage:** not hazardous, no special requirements

